

160V, 152V, 156V, 164V

Vinyl Seal

PRODUCT CUT SHEET

Material


Aluminum Alloy 6063, T5 Temper Vinyl is Black

- Thermoplastic Polymer: Polyvinyl Chloride Formulated with an Environmentally Friendly Bio-Based Plasticizer
- Economical
- Flame-Resistant
- Moisture-Resistant
- ◆ Temperature Range 0°F to 140°F
- Oxidative Degradation from Age and Exposure to Cold, Heat And UV Causes Hardening, Loss of Memory and Resilience, Cracking, Crazing and Discoloration
- #6 X 3/4" Stainless Steel Sheet Metal Screws Furnished
- Screw Holes Slotted for Adjustment


Options

FATT - Fast Attach Tape -GR = Gray Vinyl

PRODUCT#	FINISH
152V	Mill Al
152VA	Anodized Al
152VDKB	Dark Bronze
156V	Mill Al
156VDKB	Dark Bronze
160V	Mill Al
160V-GR	Mill Al
160VA	Anodized Al
160VA-GR	Anodized Al
160VDKB	Dark Bronze
160VDKB	Dark Bronze
164V	Mill Al
164VA	Anodized Al
164VDKB	Dark Bronze

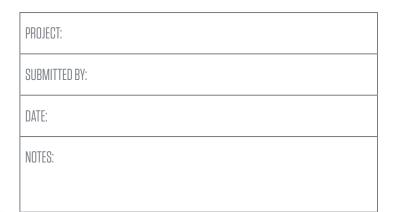





NGP-GKT-160V-PCS-1223-A



NATIONAL GUARD PRODUCTS, INC.