


ACCESS DOOR WITH HIDDEN FLANGE
FOR ALL SURFACE TYPES

CTR

INSTALLATION

> EXCLUSIVE <
ACCESS DOOR

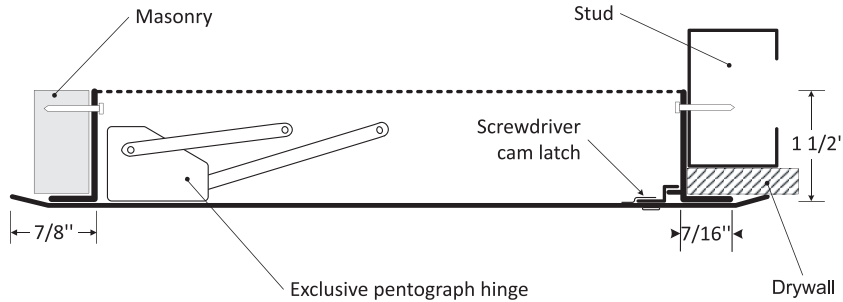

A LABOR SAVING
alternative to doors
with DRYWALL FLANGES


"No need to mud or plaster"

DIMENSIONS AND APPEARANCE

LEED ready: This product contributes to LEED® credits.

ACCESS DOORS
MADE FAST!

| DOOR SIZE W x H inches (MM) | NUMBER OF LOCKS | WEIGHT | |
|--------------------------------|--------------------|--------|------|
| | | LBS | KG |
| 8 1/4 x 8 1/4 (210 x 210) | 1 | 3 | 1.4 |
| 8 1/4 x 12 (210 x 304) | 1 | 4 | 1.8 |
| 10 x 10 (254 x 254) | 1 | 4 | 1.8 |
| 12 x 12 (304 x 304) | 1 | 6 | 2.7 |
| 14 x 14 (355 x 355) | 1 | 7 | 3.2 |
| 12 x 18 (304 x 457) | 1 | 8 | 3.6 |
| 16 x 16 (406 x 406) | 1 | 9 | 4.1 |
| 18 x 18 (457 x 457) | 3 | 10 | 4.5 |
| 18 x 24 (457 x 609) | 4 | 13 | 5.9 |
| 20 x 20 (508 x 508) | 3 | 13 | 5.9 |
| 22 x 22 (558 x 558) | 3 | 15 | 6.8 |
| 22 x 30 (558 x 762) | 5 | 17 | 7.7 |
| 22 x 36 (558 x 914) | 5 | 19 | 8.6 |
| 24 x 24 (609 x 609) | 4 | 17 | 7.7 |
| 24 x 30 (609 x 762) | 5 | 19 | 8.6 |
| 24 x 36 (609 x 914) | 5 | 24 | 10.9 |

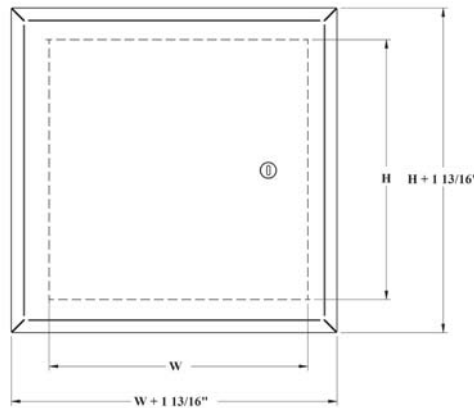

Rough wall opening is door size + 1/4" or + 6mm



DESCRIPTION AND MATERIAL SPECIFICATION

- Material:** 16 gauge cold rolled steel
- Hinge:** concealed, exclusive hinge design
- Lock / latch:** screwdriver operated cam latch
- Finish:** high quality white powder coat primer
- Packaging:** individually wrapped, 1 per box

POPULAR OPTIONS:

- Lock / latch:** key operated cylinder cam latch, hex head cam latch, pinned hex head cam latch, handle operated cam latch, mortise preparation for cylinder.
- Material:** stainless steel 304 #4 (brushed finish)
- Gasketing:** neoprene gasket

PROJECT DATA

| PROJECT NAME: | QTY | W | H | OPTIONS |
|-----------------------|---|---|---|---------|
| ARCHITECT: | | | | |
| DEALER: | | | | |
| CONTRACTOR: | | | | |
| LOCATION: | SPECIAL INSTRUCTIONS: | | | |
| DATE: | | | | |
| TAGGING INSTRUCTIONS: | SUBMITTAL APPROVAL: (signature or stamp) | | | |