

# L-VRSG-2, L-VRSG-2-TB

## VANDAL RESISTANT SECURITY LOUVER

### FOR 1 3/4" THICK DOORS

- ▶ 18 Ga. Cold Rolled Steel Frame
- ▶ Mitered and Welded Corners
- ▶ Welded Reinforcing Clips at Corners
- ▶ Inverted "V" Design
- ▶ Blades 24 Ga. Steel, Hemmed Edges
- ▶ 16 Ga. Steel, 3/4" X 3/4" Security Grille
- ▶ #6 X 1 3/4" Phillips Truss Head SMS
- ▶ Free Area 45%
- ▶ Gray Primer (GPZ) Powder Coat Finish

### Available Options

- ▶ Powder Coat Color Options - See Page L3
- ▶ Thru-Bolts (TB) for 1 3/4" Thick Doors – Required for Hurricane Rating
- ▶ Aluminum Insect Screen - 22 Ga. 1/8" Square Mesh Installed on Exterior Side Unless Requested Otherwise
- ▶ Torx Security Screws
- ▶ Galvanneal - A40 Steel (on Louver Frame and Blades, Not Available on Security Grille)
- ▶ Zinc Electroplating (Not Available on Insect Screen)


### Hurricane-Rated L-VRSG-2-TB

- ▶ Florida Building Code #FL47124
- ▶ Design Pressure =  
+/- 75 PSF  
Missile level "D" and includes Wind Zone 4 as defined in ASTM E 1996 and FBC Sections 1609.1.2.2 & R301.2.1.2.1.
- ▶ Maximum Size 30" x 64"
- ▶ Hazard - Hurricane

This Product is Not Rated for Use on Fire-Rated Doors



**VRSG-2-TB**

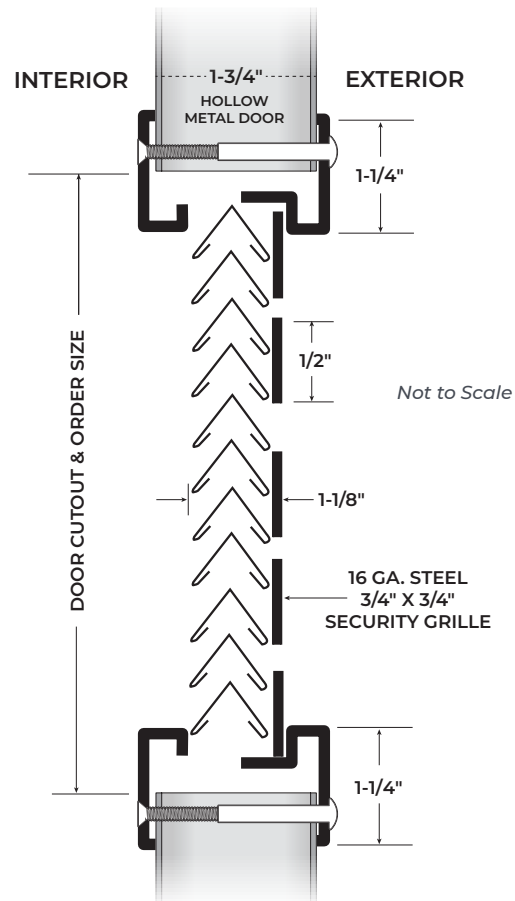

**L-VRSG-2**

Undersized 1/16" for Clearance