



# L-VRSG-2, L-VRSG-2-TB

Vandal Resistant Security Louver

## PRODUCT CUT SHEET

PROJECT:

SUBMITTED BY:

DATE:

NOTES:

### For 1 3/4" Thick Doors

- 18 Ga. Cold Rolled Steel Frame
- Mitered and Welded Corners
- Welded Reinforcing Clips at Corners
- Inverted "V" Design
- Blades 24 Ga. Steel, Hemmed Edges
- 16 Ga. Steel, 3/4" x 3/4" Security Grille
- #6 x 1 3/4" Phillips Truss Head SMS
- Free Area 45%
- Gray Primer (GPZ) Powder Coat Finish


#### Available Options

- Powder Coat Color Options - See Color Chart on [ngp.com](http://ngp.com)
- Thru-Bolts (TB) for 1 3/4" Thick Doors - Required for Hurricane Rating
- Aluminum Insect Screen - 22 Ga. 1/8" Square Mesh Installed Exterior Side Unless Requested Otherwise
- Torx Security Screws
- Galvanneal - A40 Steel (on Louver Frame and Blades, Not Available on Security Grille)
- Zinc Electroplating (Not Available on Insect Screen)

#### Hurricane-Rated L-VRSG-2-TB

- Florida Building Code #FL47124
- Design Pressure = +/- 75 PSF
- Missile level "D" and includes Wind Zone 4 as defined in ASTM E 1996 and FBC Sections 1609.1.2.2 & R301.2.1.2.1.
- Maximum Size 30" x 64"
- Hazard - Hurricane

This Product is Not Rated for Use on Fire-Rated Doors

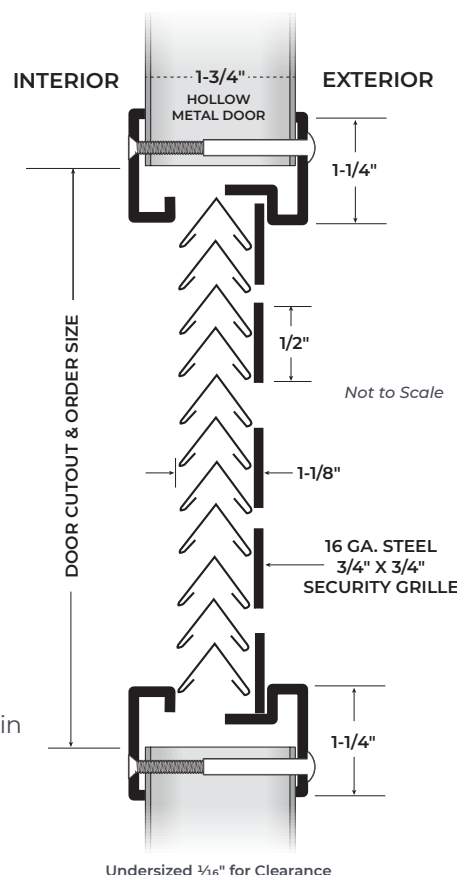

VRSG-2-TB

NGP-LIT-L-VRSG-2-PCS-0725-A

## NATIONAL GUARD PRODUCTS, INC.

### MEMPHIS

4985 East Raines Road  
Memphis, TN 38118

### CARSON CITY

3689 Arrowhead Drive  
Carson City, NV 89706

**Fax:** (800) 255-7874  
**Email:** [info@ngp.com](mailto:info@ngp.com)

**Quotes:** [quotes@ngp.com](mailto:quotes@ngp.com)  
**Orders:** [orders@ngp.com](mailto:orders@ngp.com)

**ngp.com**  
1-800-NGP-RUSH