8435

Thermal Break Bumper Seal Threshold

PRODUCT CUT SHEET


PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Material

Aluminum Alloy 6063, T5 Temper
Neoprene, Silicone and Vinyl are Black

- 5 ⅛" Wide x ⅞" Tall
- Fluted Top
- BHMA Certified to ANSI/BHMA A156.21 1,000 Lb. Load Test
- Features a Rigid Thermoplastic Spline Creating a Separation to Prevent the Transfer of Outside Temperature and Frost Through the Threshold
- Typical Wall Thickness .110"
- Weight: .95 Lbs./Ft.
- #10 x 1 ½" FH Zinc Plated Wood Screws Included

(V) Vinyl Bumper Seal Standard
Optional: (N) Neoprene
(S) Silicone

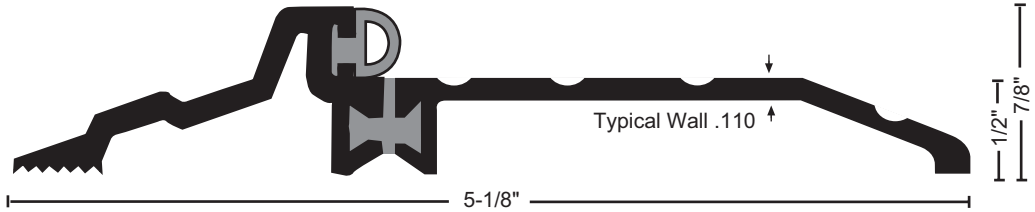

Aluminum Finishes

Mill
B - Black Anodized
DKB - Dark Bronze

Options

Optional Slip Resistant SIA Finish

BHMA CERTIFIED

NGP-THR-8435-PCS-0626-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS
4985 East Raines Road
Memphis, TN 38118

CARSON CITY
3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH