


FIRE RATED UNINSULATED ACCESS DOOR WITH DRYWALL FLANGE

PFN-GYP

INSTALLATION: WALLS ONLY

[3 HOUR WALL APPLICATION]

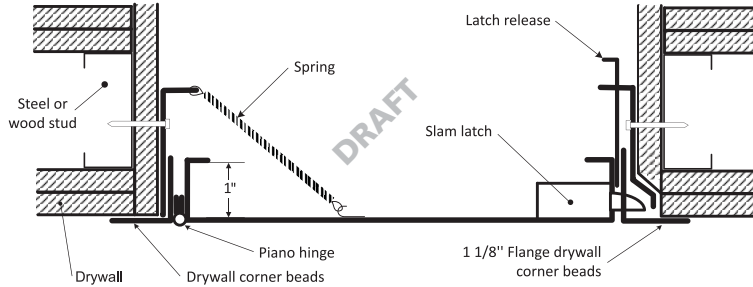


Authorities Having Jurisdiction (AHJ) should be consulted in all cases as to the particular requirements covering the installation and use of fire rated access doors.

DIMENSIONS AND APPEARANCE

LEED ready: This product contributes to LEED® credits.

ACCESS DOORS MADE FAST!

DOOR SIZE W x H inches (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
8 x 8 (203 x 203)	1	5	2.3
10 x 10 (254 x 254)	1	7	3.2
12 x 12 (304 x 304)	1	8	3.6
14 x 14 (355 x 355)	1	10	4.5
16 x 16 (406 x 406)	1	12	5.5
18 x 18 (457 x 457)	1	14	6.4
22 x 22 (558 x 558)	1	18	8.2
22 x 30 (558 x 762)	1	22	10
22 x 36 (558 x 914)	2	27	12.2
24 x 24 (609 x 609)	1	22	10
24 x 36 (609 x 914)	2	29	13.2
30 x 30 (762 x 762)	1	30	13.6
32 x 32 (812 x 812)	2	33	15
36 x 36 (914 x 914)	2	39	17.7

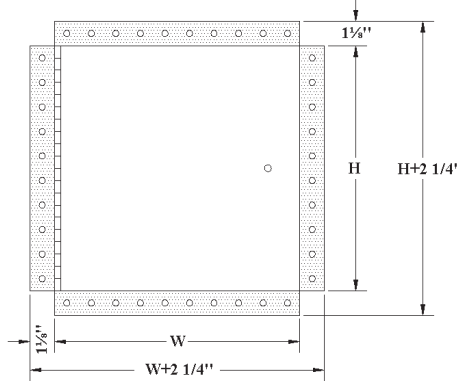

Rough wall opening is door size + 1/4" or + 6mm



DESCRIPTION AND MATERIAL SPECIFICATION

FIRE RATING: 2 hour fire barrier, rating 1½ hours.
Access/Door Frame Assembly (uninsulated) for installation in vertical wall assemblies.

Maximum door size of: 36" x 36".

STANDARDS LISTED: NFPA 252-2003, UL 10b, UL-555, CAN/ULC S112 M90-R2001, CAN/ULC S104-10.
MEA # 507-06-M

- Material:** 16 gauge cold rolled steel
- Hinge:** continuous piano hinge
- Lock / latch:** self latching tool-key operated latch and/or ring operated latch, both included
- Inside panel release:** standard on all doors over 12" x 12"

- GYP:** drywall corner beads flange
- Automatic panel closer:** standard on all doors
- Finish:** high quality white powder coat primer
- Packaging:** individually wrapped, 1 per box

POPULAR OPTIONS:

- Material:** stainless steel #4 (brushed finish),
- Lock / latch:** key operated cylinder cam latch, handle operated slam latch, mortise preparation for cylinder (cylinder optional), hex head slam latch, mortise deadbolt lock
- Masonry anchor:** available on all sizes



FIRE RATED FOR WALL APPLICATIONS ONLY

PROJECT DATA

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)			

Office/Warehouse: 350 Thorens Avenue, Garden City Park, NY 11040
Warehouses: California, Colorado, Florida, Illinois, Pennsylvania, Texas

Tel.: 516-294-1801
Fax: 516-294-1828

Toll Free Phone: 888.634.3667
www.metropolitandoor.com