


RAPTOR SERIES GLASS FIBER REINFORCED GYPSUM ACCESS DOOR PUSH UP RADIUS CORNERS
- For Drywall Ceiling Applications Only




INSTALLATION

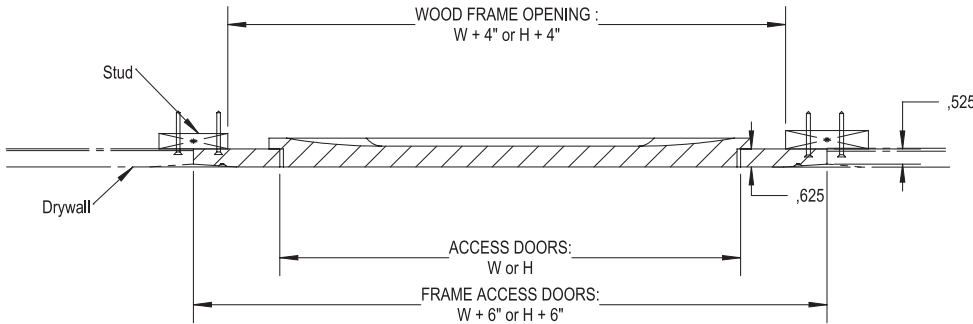

DIMENSION AND APPEARANCE

DOOR SIZE - W x H INCHES (MM)	WEIGHT	
	LBS	KG
9 x 9 (229 x 229)	6	2.72
12 x 12 (304 x 304)	8	3.63
16 x 16 (406 x 406)	10	4.54
18 x 18 (457 x 457)	11	4.99
24 x 24 (609 x 609)	16	7.26

Rough wall opening = door size + 6"

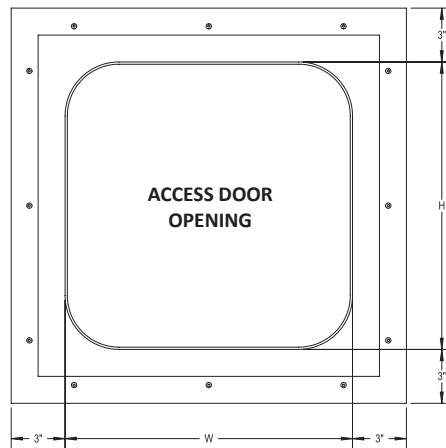

TECHNICAL DATA

Shell Thickness	1/8" to 3/16"
Fastener Test Pull Out (wood stud)	525 lb avg.
Fastener Test Pull Out (metal stud)	215 lb avg.
Fastener Push Through Test	350 lb avg.
Fuel Contribution (ASTM E84-80)	0
Flame Spread (ASTM E84-80)	0
Smoke Index (ASTM E84-80)	0
Combustion (ASTM E84-80)	Non-combustible
Class A non-rated	-----

DESCRIPTION AND MATERIAL SPECIFICATION

Material: Lightweight glass fiber reinforced gypsum.

Hinge: No hinge. Gravity based closure and removable door.

Lock / latch: None

Finish: Rounded corners (radius finish). To be primed and painted on site.

Odd sizes available: Custom size doors are available. Lead-time varies.

Packaging: Individually wrapped. 1 per box.

POPULAR OPTIONS:

- Square corners
- Hinged
- Cylinder or screwdriver latch
- Round door
- Gasketing (neoprene gasket)



PROJECT DATA

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)			