



STORM-PRO-HR

Low-Profile Hurricane-Rated Lite Kit

PRODUCT CUT SHEET



PROJECT:

SUBMITTED BY:

DATE:

NOTES:

For 1 3/4" Doors

- 20 Ga. Galvanneal A40 Steel
- Mitered and Welded Corners
- Countersunk Mounting Screw-Holes
- #8 X 1 3/4" Phillips Head SMS
- Maximum Order Size: 30" X 64"
- Available in Uneven and Fractional Sizes
- Gray Primer (GPZ) Powder Coat Finish
- 1/2" Laminated Glass: 2 pcs. 3/16" Clear Glass with PVB Interlayer
- Structural Silicone Sealant DOW 995
- Siliconized Acrylic Caulk, White

Available Options


- Powder Coat Color Options - See Color Chart on ngp.com
- Torx Security Screws
- Zinc Electroplating

Hurricane-Rated


- Florida Building Code #FL47124
- Design Pressure = +/- 75 PSF
Missile level "D" and includes Wind Zone 4 as defined in ASTM E 1996 and FBC Sections 1609.1.2.2 & R301.2.1.2.1.
- Meets the water infiltration requirements for the "HVHZ."
- Hazard - Hurricane

This Product is Not Rated for Use on Fire-Rated Doors

Anemostat DOOR PRODUCTS

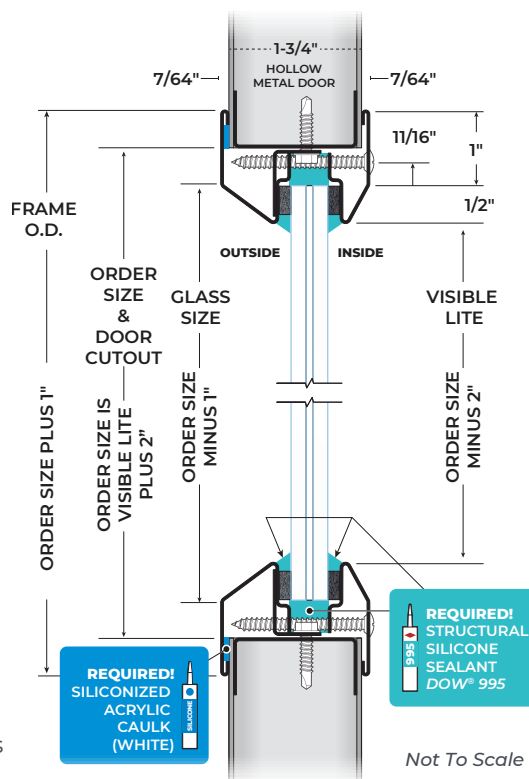

Not To Scale

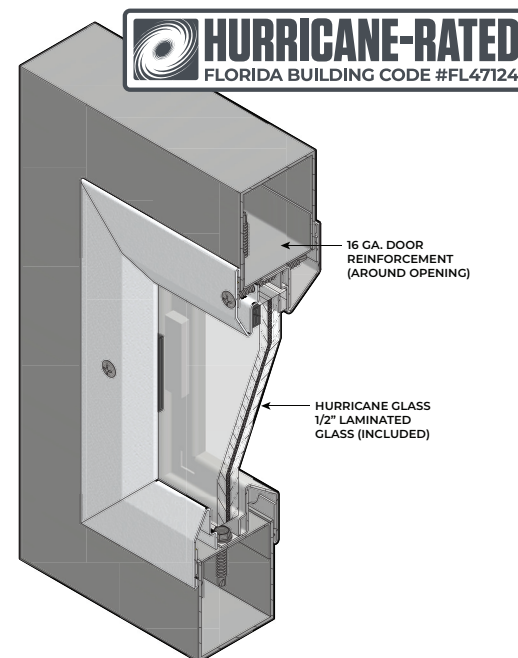

Designed for Use on Doors Manufactured Within Door Industry Tolerance of +/- 1/16".

NGP-LIT-STORM-PRO-HR-PCS-0525-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH