
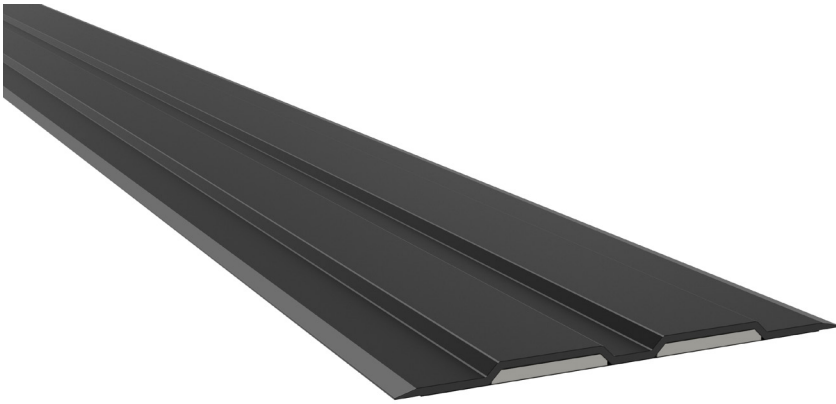


# PEMKO

## EZGAP™ XG10 SERIES

### EXCESSIVE GAP GASKET

Experience a safer  
and more open world



#### MATERIAL COMPOSITION:

XG10 Series consists of a flexible graphite intumescent captured in a semi rigid PVC cover with adhesive on one side.

#### COLORS:

Stock colors include White, Grey, Brown and Black. Other colors are available upon request. There may be a surcharge for special colors.

#### SIZE:

XG10 Series is a semi rigid product supplied in a roll.

- Product Dimensions:  $1/16"$  x  $1 9/16"$  is standard.
- Available Lengths: XG10 Series is supplied as an 18' or 50' roll that can be cut to required lengths.

#### SPECIAL HANDLING REQUIREMENTS:

XG10 Series should be stored at ambient temperatures between 40° F and 140° F. The adhesive backing used on XG10 Series has a shelf life of 18 months. Stocks should be rotated to accommodate this aging.

#### TEMPERATURE EXPOSURE:

XG10 Series will remain flexible in a wide range of temperatures. The following is a guideline for properties of PVC. Environmental conditions and placement of the product may alter these temperature ranges.

- Cold: XG10 Series should remain flexible to -30° F.
- Hot: XG10 Series should remain flexible to 140° F.

#### CHEMICAL EXPOSURE:

PVC resists most acids, strong Alkalis, salts and paraffinic hydrocarbon solutions. It is not recommended for use with chlorinated or aromatic hydrocarbons, esters or polar solvents such as ketones.

#### EXPANSION CHARACTERISTICS:

Products containing intumescent materials will expand at a variety of rates and temperatures. The following information serves as a guideline. Environmental conditions and placement of the product may alter these temperature ranges.

- Temperature for Expansion: 390° F.
- Rate of Expansion: 18:1 average.

#### MOISTURE RESISTANCE:

Good resistance to water and humidity.